

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TRANSTECTOR, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF TRANSTECTOR, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	04/12/2023	HBAKKE	GUTTADAURO

1. CONSTRUCTION:

CONDUCTOR: 12 AWG TINNED COPPER
 INSULATION: POLYVINYLCHLORIDE, .015" NOM. WALL THICKNESS
 INNER JACKET: NYLON, MIN THICKNESS .004"
 SHIELD: NON-WOVEN, COVERAGE ≥25%
 JACKET: POLYVINYLCHLORIDE, BLACK, .045" NOM. WALL THICKNESS.
 OVERALL CABLE DIAMETER

NOM. DIA.
 .091"
 .144"
 .155"
 .453±.016"

2. PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX 90°C
 TEMPERATURE RATING, MIN. -40°C
 JACKET IS UV RESISTANT

3. ELECTRICAL CHARACTERISTICS:

DIELECTRIC STRENGTH (kv/1min) 2.0(AC)
 VOLTAGE RATING, MAX. 600V
 MAX COND D.C. RESISTANCE AT 20°C (Ω/km) ≤5.64

4. REFERENCE STANDARD:


UL1277 & UL1581 & UL83
 MEETS (UL) VW-1 FLAME TEST



5. MARKING IN WHITE:

E497465 (UL) TYPE TC-ER THHN 3C 12AWG 90°C DRY/75°C WET
 600V SUN RES VW-1 -40°C JHOSIN

6. CONDUCTOR COLOR:

1. RED
2. BLACK
3. BLUE

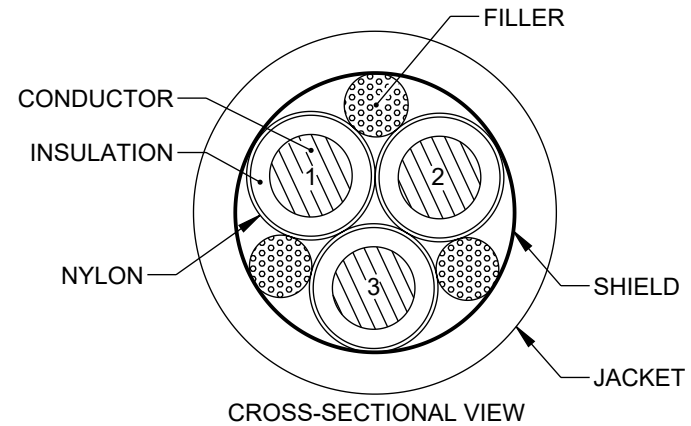

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [5] ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS	DATE	 an INFINIT® brand CATEGORY BULK CABLE PRODUCT DESCRIPTION Shielded Power Bulk Tray Cable, Exposed Run, 3 Conductor 12AWG 600V, TC-ER THHN THWN, UL86 UL1277 UL1581, 90C UV Res VW-1 PVC Black, 1KFT	10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041		
	DRAWN BY HBAKKE	04/12/2023				
	CHECKED BY DMAY	04/12/2023				
	APPROVED BY DGUST	04/12/2023				
THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	CAGE CODE 30992	ITEM NO. BPCTC123S	REV. A
SCALE: NONE			CAD FILE: BPCTC123S.SLDDRW		SHEET 1 OF 1	

REGULATORY COMPLIANCE:
 EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)