

Power Over Ethernet PoE Midspan Injector Category 6 1 Port 802.3at Type B Outdoor w/ Lightning Protection & Power Supply 48 Volts 70 Watts

PI-1C6-ATB-LPOD-4848 PoE Injector



Features

- IEEE 802.3at compatibility
- Includes 48VDC @ 48 Watt power supply
- Midspan type PoE injector with Type B wiring
- Rugged die cast aluminum enclosure in weatherproof box
- 1 port design
- Lightning and surge protection included

Applications

- IP Cameras
- VoIP (Voice over Internet Protocol) Telephones
- Access points, bridges, amplifiers and amplified antennas
- Building and control systems
- Digital signage
- Network switches
- Lighting systems
- Traffic systems
- Smart home and building
- POS systems

Description

Transtector's PI-1C6-ATB-LPOD-4848 outdoor single-port Gigabit Category 6 (Cat 6) Midspan/Injector is a commercial grade Power-over-Ethernet device that provides DC or AC power for one 10/100/1000 Base-T Power-over-Ethernet, PoE equipped network device. PoE is used to supply power to devices such as Cameras, Access Points, IP Phones, and the like eliminating the need for an outlet near the devices and extra power cables. The unit uses Gigabit transformers on all four data pairs in contrast to cheaper designs that only use transformers for two pairs. It is compatible with devices that support the IEEE 802.3af and 802.3at standard PoE power feed using Mode B (Pins 4/5 and 7/8). The unit supports both positive and negative DC as well as AC power up to 60 volts. An integral PTC fuse cuts power in case of a short. The PTC fuse auto resets after the short is removed. The PI-1C6-ATB-LPOD-4848 features integral surge protection for the data and power feeds for networks. It has been designed to meet the GR-1089 Intra-Building surge protection requirements for Ethernet lines. The design provides protection for both common and differential mode surges utilizing three-pole differential Gas Tubes. The tubes feature ultra-low Line to Line and Line to Ground capacitance to minimize distortion of high-speed signals. The unit also features shielded RJ45 jacks. This along with a metal housing helps reduce the effects of EMI interference. A ground lug and terminal is provided directly on the injector housing providing superior grounding. The cast aluminum housing includes integral mounting feet for ease of installation. The compact weather resistant housing features a lockable hinged cover and mounting holes are provided on the rear of the enclosure for mounting if desired. The two cable grommets may be adjusted to cable size and are removable. This kit includes the protector/injector housed in a weatherproof, outdoor rated enclosure and a 48VDC @ 48W power supply (PIPS-48V48W-R25MMDC). Transtector also sells Ethernet surge protection devices and Ethernet cables capable of connecting PoE devices. Check out Transtector's website and buy online today.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Ethernet Connectors		RJ45 Jack		
PoE Version		802.3at		
Ethernet Standard		Category 6, 10/100/1000Base-T		

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications:
[Power Over Ethernet PoE Midspan Injector Category 6 1 Port 802.3at Type B Outdoor w/ Lightning Protection & Power Supply 48 Volts 70 Watts](#)

Power Over Ethernet PoE Midspan Injector Category 6 1 Port 802.3at Type B Outdoor w/ Lightning Protection & Power Supply 48 Volts 70 Watts



PI-1C6-ATB-LPOD-4848
 PoE Injector

Max Current	1.5	A
Voltage Rating DC (Input)	48	VDC
Voltage Rating DC (Output)	48	VDC
Operating Voltage DC	60	VDC
Operating Voltage AC	60	VAC
Power Connector	2.5mm DC Jack	
Wire Type	Type B	

Mechanical Specifications

Size

Height	1.5 in	[38.1 mm]
Width	2.5 in	[63.5 mm]
Length	4.2 in	[106.68 mm]
Weight	1.25 lbs	[566.99 g]
Housing Material	Aluminum	
Grounding Lug	Yes	
Mounting Type	Mounting Feet	

Environmental Specifications

Operating Temperature, Injector	-40 to +70 deg C
Environment Type	Outdoor

Transtector Systems specializes in protection of highly sensitive, low voltage equipment through its patented, non-degrading silicon diode technology and custom filters. Our power quality expertise translates into a diverse product offering including AC, DC, and signal applications as well as integrated cabinets, power distribution panels and EMP hardened devices.

Click the following link (or enter part number in “SEARCH” on website) to obtain additional part information including price, inventory and certifications: [Power Over Ethernet PoE Midspan Injector Category 6 1 Port 802.3at Type B Outdoor w/ Lightning Protection & Power Supply 48 Volts 70 Watts](https://www.transtector.com/poe-injector-category-6-1-port-rj45-jack-pi-1c6-atb-lpod-4848-p.aspx)

URL: <https://www.transtector.com/poe-injector-category-6-1-port-rj45-jack-pi-1c6-atb-lpod-4848-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Transtector reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Transtector does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Transtector does not assume any liability arising out of the use of any part or documentation.


Power Over Ethernet PoE Midspan Injector Category 6, 1 Port 802.3at Type B

Outdoor w/ Lightning Protection & Power Supply 48 Volts 70 Watts

CAD Drawing

1 2 3 4 5 6 7 8

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TRANSTECTOR, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF TRANSTECTOR, INC. IS PROHIBITED.

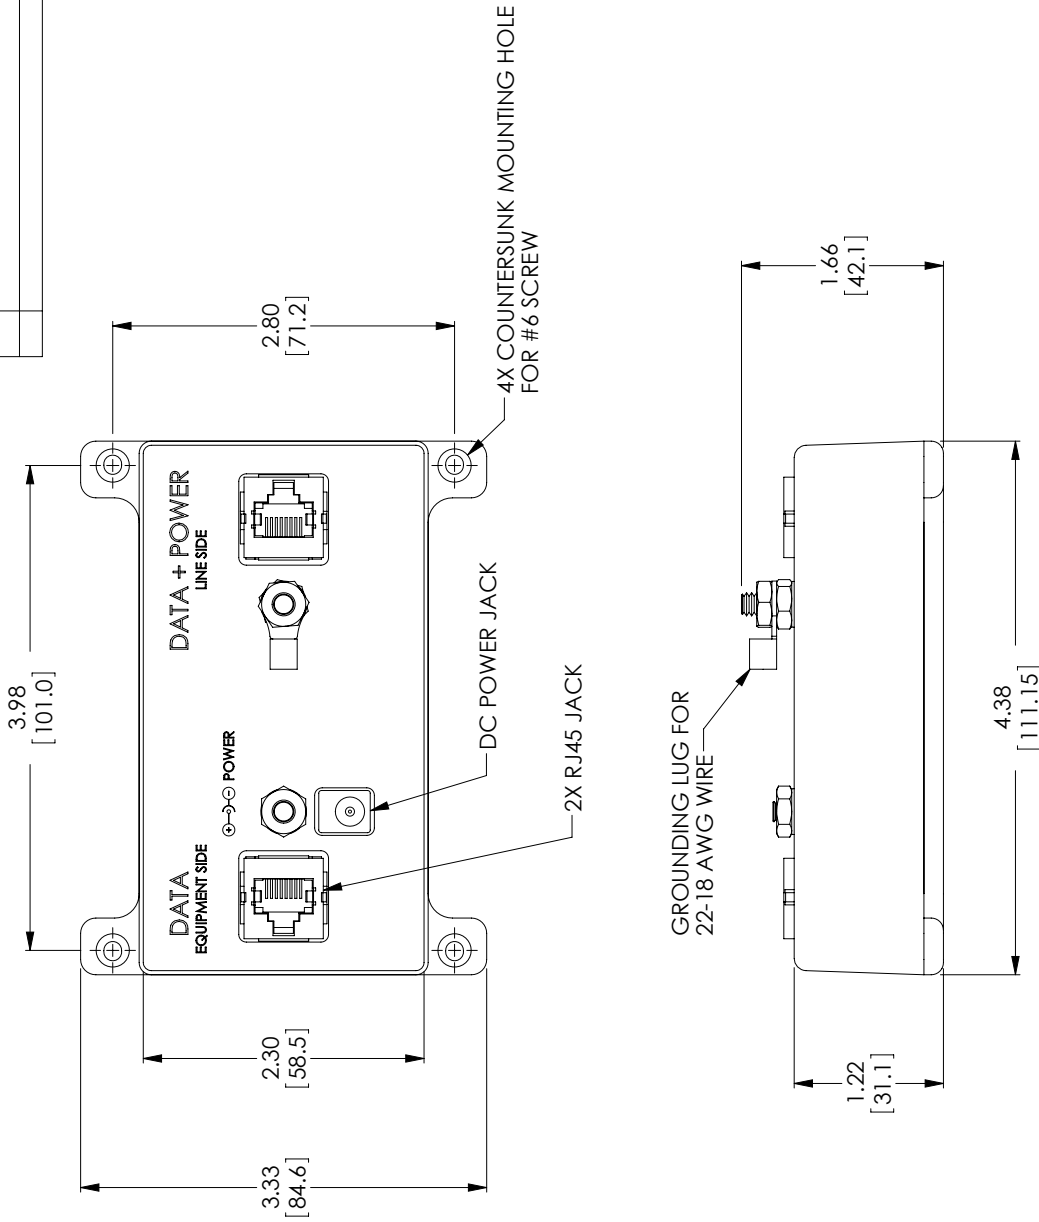

REV	DESCRIPTION	DATE	APPROVED
A	CN INITIAL RELEASE	03/13/20	DGUTADAURO

<p>an INFINITO brand</p>		10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.9.55.2041	
APPROVALS DRAWN BY: D.CUI CHECKED BY: SPAN APPROVED BY: DGUTADAURO		DATE 03/09/20 03/09/20 03/09/20	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [MM] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0		CATEGORY POWER OVER ETHERNET	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] .XX = ± .02 [1.5] .XXX = ± .005 [1.3] FRACTIONS ± 1/32 ANGLES ± 1°		PRODUCT DESCRIPTION POE INJECTOR CAT6 1PORT 802.3AT B W/ LP 48V48W OD	
THIRD-ANGLE PROJECTION		SCALE: NONE CAD FILE: PI-1C6-ATB-LPOD-4848.SLDDRW	
COLOR VARIATIONS MAY OCCUR		SHEET 1 OF 1	

- NOTE:**
1. COMPONENT ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED
 2. ALL DIMENSIONS FOR REFERENCE ONLY