

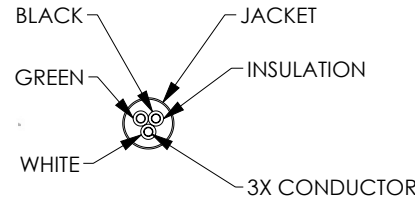


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TRANSTECTOR, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF TRANSTECTOR, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	04/19/2023	KGLEBOVA	GUTTADAURO

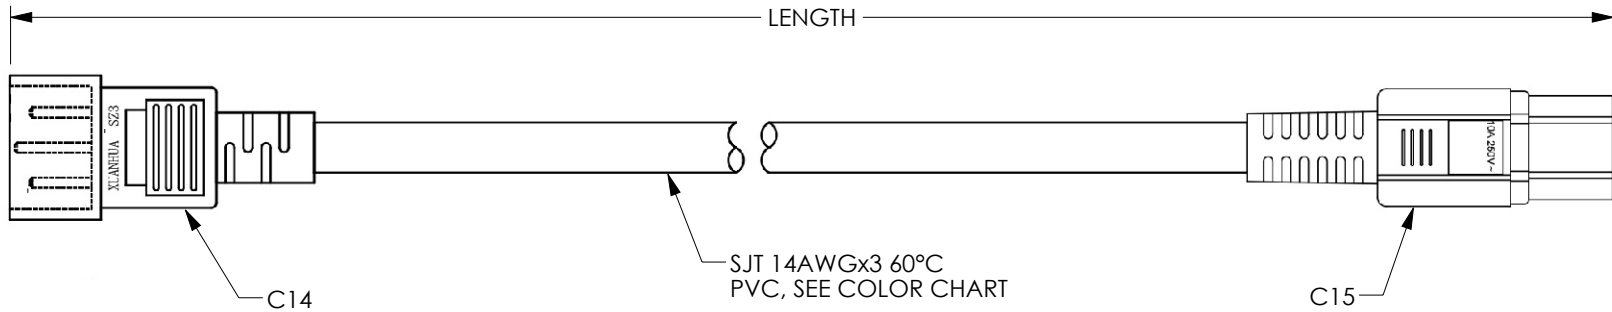

LENGTH FEET [METER]	BLACK	BLUE	WHITE	GREEN	RED
1.0 [.30]	TTA00005-01F	TTA00005BL-01F	TTA00005WH-01F	-	TTA00005RD-01F
2.0 [.61]	TTA00005-02F	TTA00005BL-02F	-	-	TTA00005RD-02F
3.0 [.91]	TTA00005-03F	TTA00005BL-03F	TTA00005WH-03F	TTA00005GN-03F	TTA00005RD-03F
6.0 [1.83]	TTA00005-06F	TTA00005BL-06F	-	TTA00005GN-06F	TTA00005RD-06F
8.0 [2.44]	TTA00005-08F	TTA00005BL-08F	-	TTA00005GN-08F	TTA00005RD-08F
25.0 [7.62]	TTA00005-25F	-	-	-	-

NOTES:

- VOLTAGE RATING: AC  $\geq$  1500V/S
- CONNECTOR C14 POWER RATING: 15A UL-E257089
- CONNECTOR C15 POWER RATING: 15A UL-E257089
- CABLE: SJT 14AWGx3, 300V, 60°C VW-1 E313867 FT1
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [5]   ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS DRAWN BY KGLEBOVA CHECKED BY DFRISIELLO APPROVED BY GUTTADAURO	DATE 04/05/2023 04/07/2023 04/11/2023	10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041 an INFINITI® brand CATEGORY <b>POWER PRODUCTS</b> PRODUCT DESCRIPTION <b>HIGH TEMPERATURE POWER CORD - C14 TO C15 - 15Amp</b>	SCALE: NONE CAD FILE: tta00005-xxx.SLDDRW SHEET 1 OF 1
	THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR		