





THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TRANSTECTOR, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF TRANSTECTOR, INC. IS PROHIBITED.



REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	04/19/2023	KGLEBOVA	GUTTADAURO

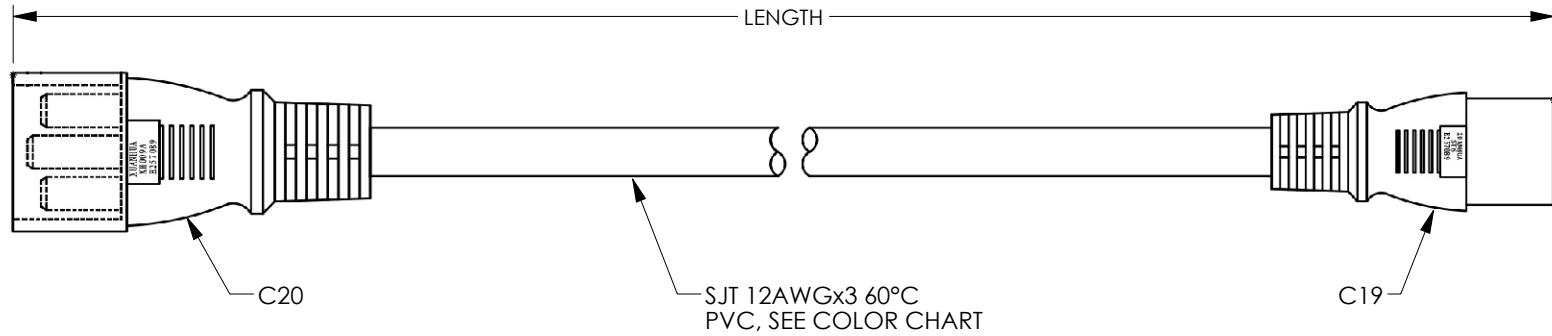

LENGTH FEET [METER]	ITEM NUMBER
1.0 [.30]	TTA00008-01F
2.0 [.61]	TTA00008-02F
3.0 [.91]	TTA00008-03F
6.0 [1.83]	TTA00008-06F
8.0 [2.44]	TTA00008-08F
10.0 [3.04]	TTA00008-10F
15.0 [4.57]	TTA00008-15F
25.0 [7.62]	TTA00008-25F

NOTES:

- VOLTAGE RATING: AC  $\geq$  1500V/S
- CONNECTOR C19 POWER RATING: 20A UL-E257089
- CONNECTOR C20 POWER RATING: 20A UL-E257089
- CABLE: SJT 12AWGx3, 300V, 60°C VW-1 E313667 FT1
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [5]   ANGLES ± 1° .XXX = ± .005 [1.3]	APPROVALS	DATE	 10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041
	DRAWN BY KGLEBOVA	04/05/2023	
THIRD-ANGLE PROJECTION 	CHECKED BY DFRISIELLO	04/07/2023	CATEGORY POWER PRODUCTS
	APPROVED BY GUTTADAURO	04/11/2023	PRODUCT DESCRIPTION SERVER/PDU POWER CORD C-20 TO C19, 20 Amp - BLACK
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SCALE: NONE   CAD FILE: tta00008-xxx.SLDDRW
	COLOR VARIATIONS MAY OCCUR	SIZE A	CAGE CODE 30992
		ITEM NO. TTA00008-XXX	REV. A
			SHEET 1 OF 1