
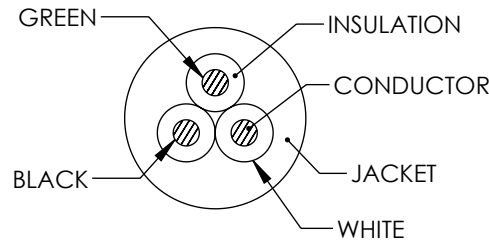


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TRANSTECTOR, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF TRANSTECTOR, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	04/19/2023	KGLEBOVA	GUTTADAURO

D
C
B
A



D
C
B
A

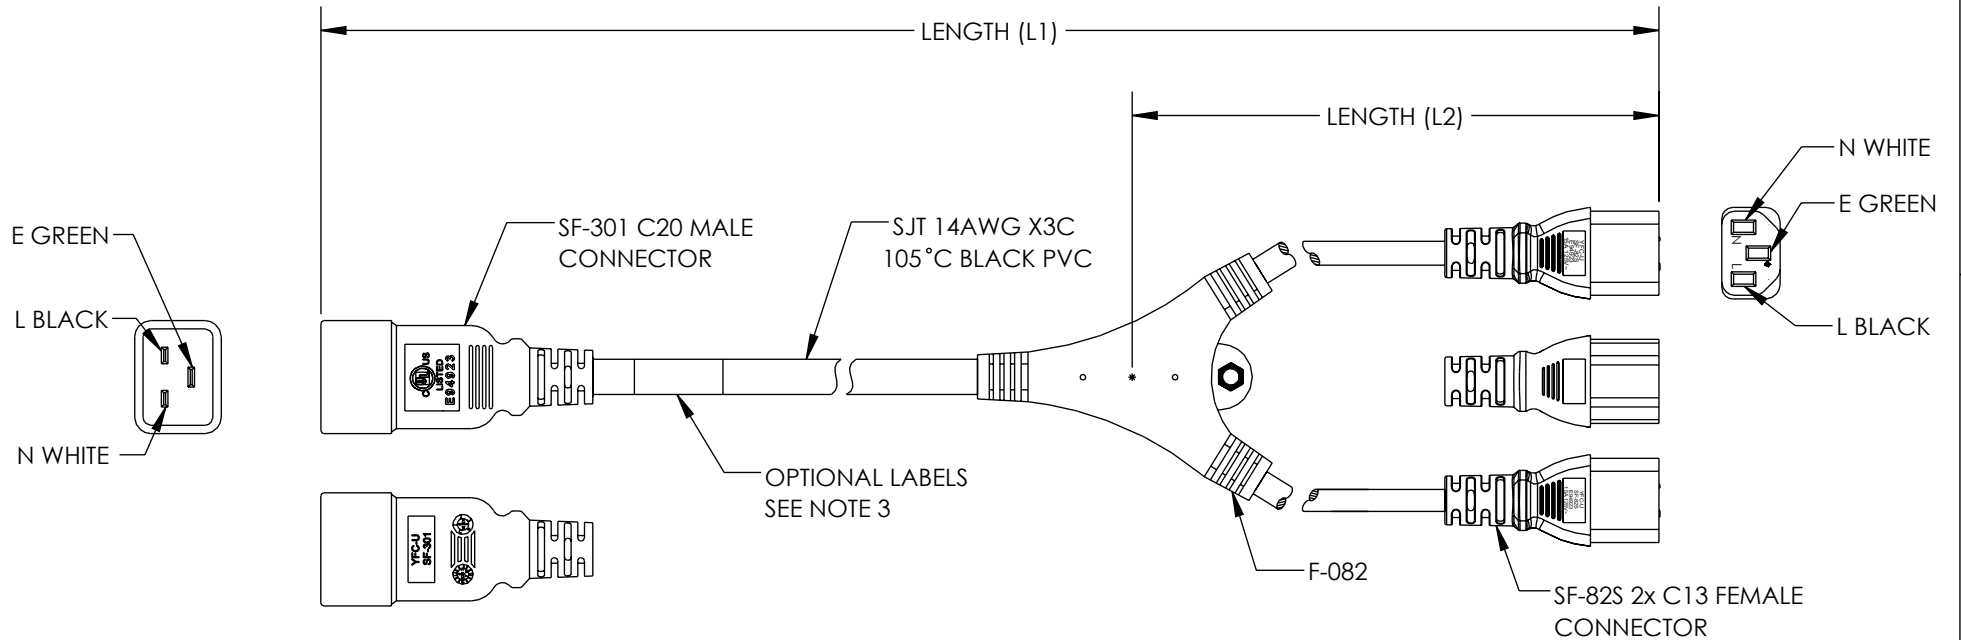

ITEM NUMBER	LENGTH (L1) INCHES [MM]	LENGTH (L2) INCHES [MM]
TTA00041-2F	24.0 ± 0.4 [610 ± 10.0]	9.0 ± 0.4 [228 ± 10.0]
TTA00041-3F	36.0 ± 0.4 [915 ± 10.0]	12.0 ± 0.4 [304 ± 10.0]
TTA00041-4F	48.0 ± 0.8 [1220 ± 20.0]	12.0 ± 0.4 [304 ± 10.0]
TTA00041-6F	72.0 ± 0.8 [1830 ± 20.0]	24.0 ± 0.4 [609 ± 10.0]

NOTES:

- VOLTAGE RATING:
DIELECTRIC VOLTAGE WITHSTAND TEST: 1500V / 1 Sec
CONDUCTOR RESISTANCE ≤ 8.88Ω/1000M
VOLTAGE RATING AC 300V
- CABLE MARKING :
(UL) E135710-F5 SJT 3×14AWG 105°C 300V VW-1
c(UL)SJT 3×2.08 mm² (14AWG) 105°C 300V FT2
- OPTIONAL LABELS:
OPTIONAL LABEL(S) MAY INCLUDE
UL, CURRENT AND/OR WARNING
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS	DATE	 an INFINITI® brand 10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041			
	DRAWN BY KGLEBOVA CHECKED BY DFRISIELLO APPROVED BY GUTTADAURO	04/06/2023 04/10/2023 04/12/2023		CATEGORY POWER PRODUCTS		
THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION C20 - 2C13 SPLIT POWER CORD, 15A, 250V	SIZE A SCALE: NONE	CAGE CODE 30992 CAD FILE: tta00041-xx.SLDDRW	ITEM NO. TTA00041-XX	REV. A SHEET 1 OF 1