


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TRANSTECTOR, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF TRANSTECTOR, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	04/19/2023	KGLEBOVA	GUTTADAURO

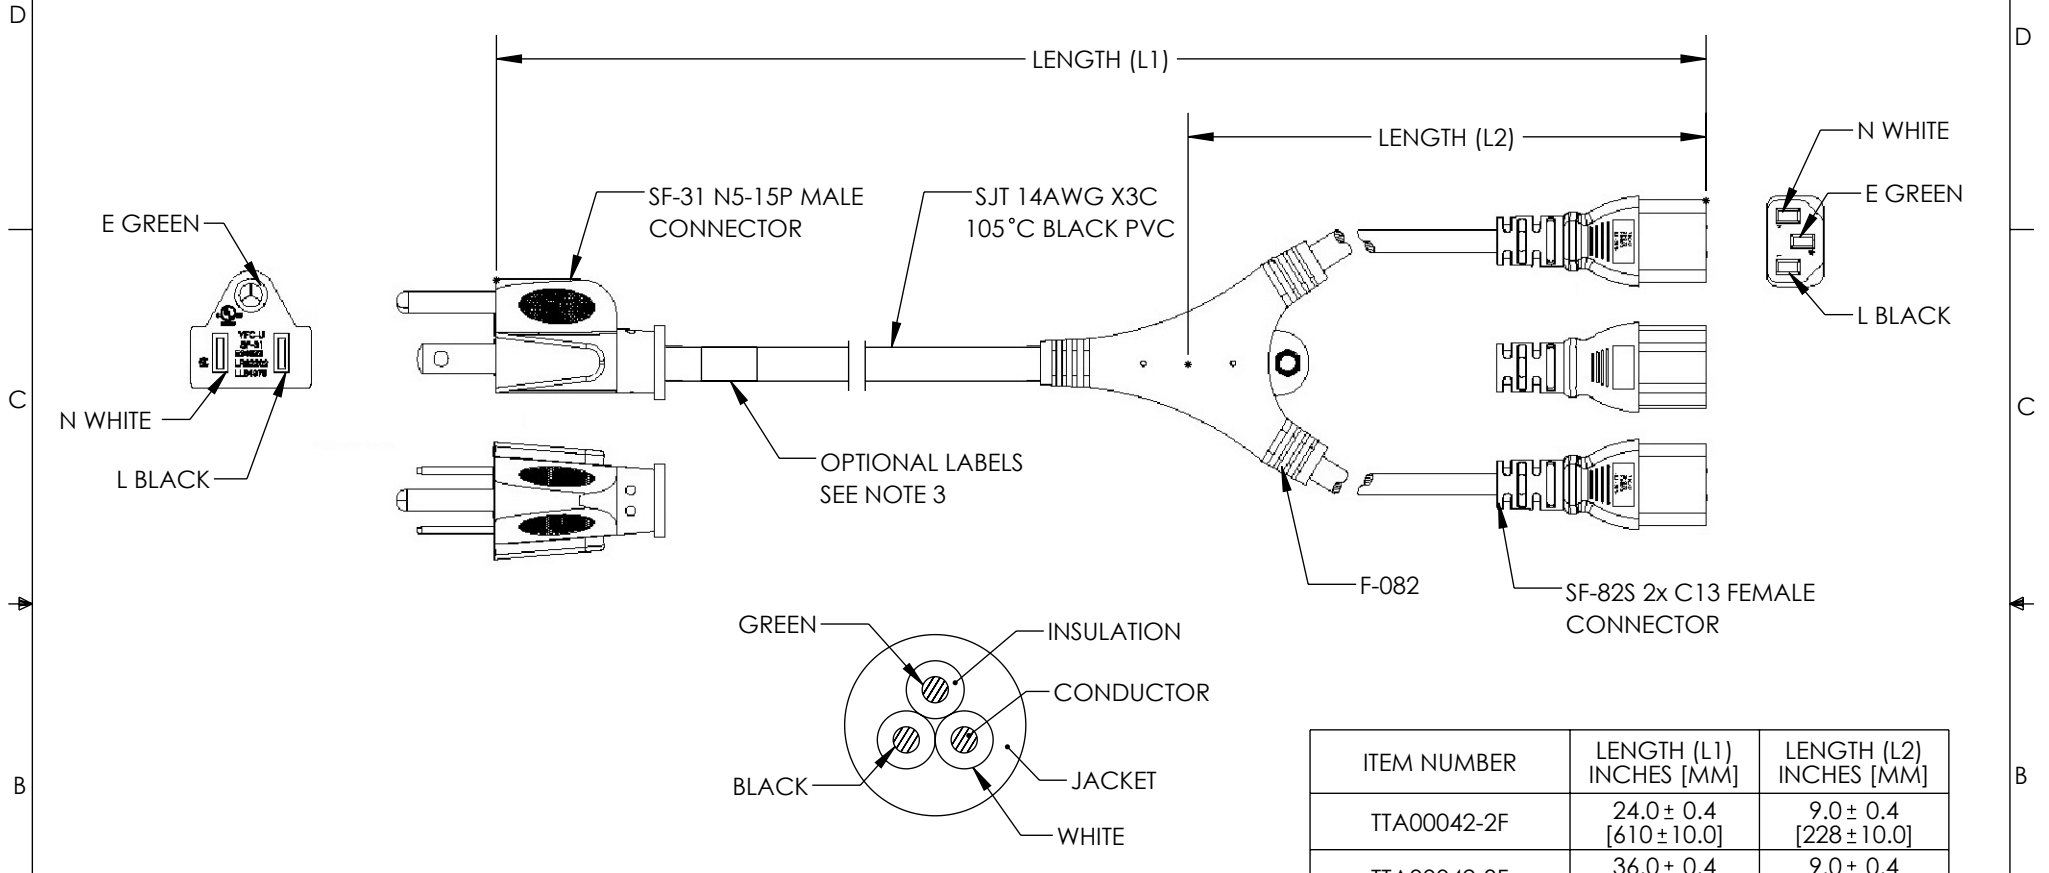

NOTES:

- VOLTAGE RATING:  
DIELECTRIC VOLTAGE WITHSTAND TEST: 1500V / 1 Sec  
CONDUCTOR RESISTANCE  $\leq 8.88\Omega/1000M$   
VOLTAGE RATING AC 300V
- CABLE MARKING :  
(UL) E135710-F5 SGT 3x14AWG 105°C 300V VW-1  
c(UL)SGT 3x2.08 mm<sup>2</sup> (14AWG) 105°C 300V FT2
- OPTIONAL LABELS:  
OPTIONAL LABEL(S) MAY INCLUDE  
UL, CURRENT AND/OR WARNING
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

ITEM NUMBER	LENGTH (L1) INCHES [MM]	LENGTH (L2) INCHES [MM]
TTA00042-2F	24.0 ± 0.4 [610 ± 10.0]	9.0 ± 0.4 [228 ± 10.0]
TTA00042-3F	36.0 ± 0.4 [915 ± 10.0]	9.0 ± 0.4 [228 ± 10.0]
TTA00042-4F	48.0 ± 0.8 [1220 ± 20.0]	9.0 ± 0.4 [228 ± 10.0]
TTA00042-6F	72.0 ± 0.8 [1830 ± 20.0]	24.0 ± 0.4 [609 ± 10.0]

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\leq 12$ [305] = +1 [25] / -0 $> 12$ [305] $\leq 60$ [1524] = +2 [51] / -0 $> 60$ [1524] $\leq 120$ [3048] = +4 [102] / -0 $> 120$ [3048] $\leq 300$ [7620] = +6 [152] / -0 $> 300$ [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [5]   ANGLES ± 1° .XXX = ± .005 [1.3]	APPROVALS DRAWN BY KGLEBOVA CHECKED BY DFRISIELLO APPROVED BY GUTTADAURO	DATE 04/06/2023 04/10/2023 04/12/2023	 an INFINITI® brand 10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041	
	THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY  COLOR VARIATIONS MAY OCCUR		CATEGORY <b>POWER PRODUCTS</b>  PRODUCT DESCRIPTION <b>N5-15P - 2C13 SPLIT POWER CORD, 15A, 125V</b>
SIZE <b>A</b>		CAGE CODE <b>30992</b>	ITEM NO. <b>TTA00042-XX</b>	REV. <b>A</b>
SCALE: NONE		CAD FILE: tta00042-xx.SLDDRW		SHEET 1 OF 1