



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TRANSECTOR, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF TRANSECTOR, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	04/19/2023	KGLEBOVA	GUTTADAURO

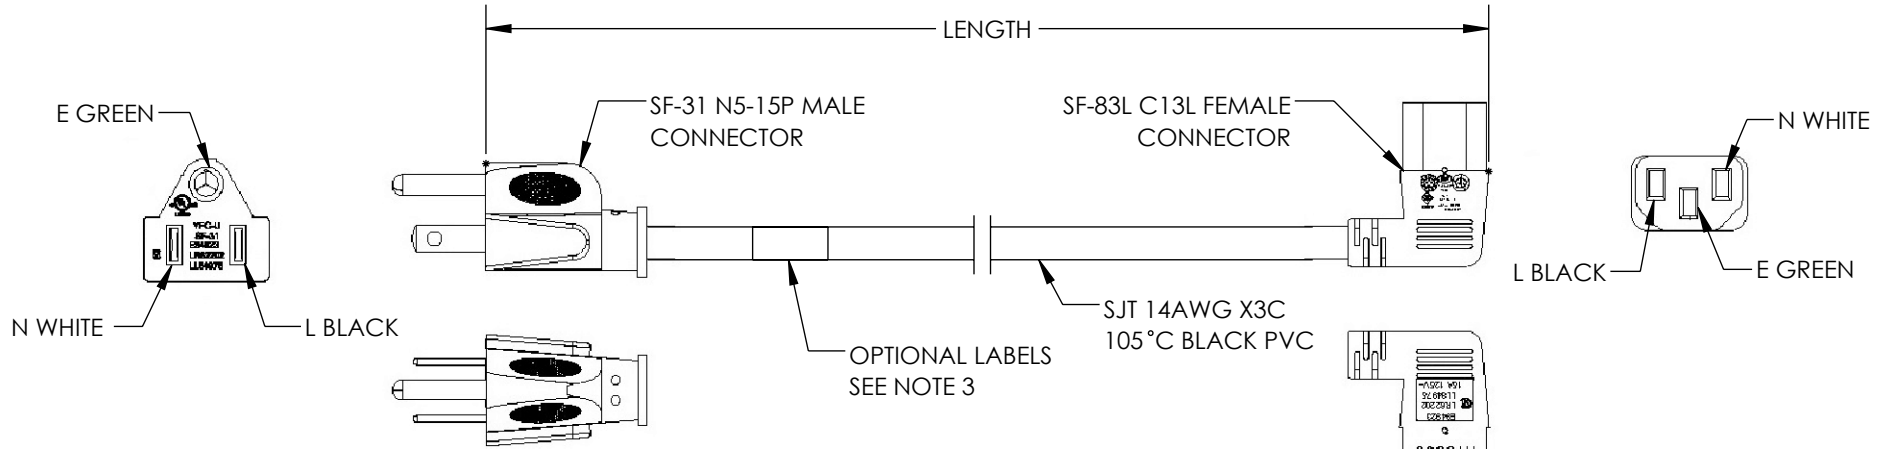

ITEM NUMBER	LENGTH INCHES [MM]
TTA00043-3F	36.0 ± 0.4 [915 ± 10.0]
TTA00043-6F	72.0 ± 0.8 [1830 ± 20.0]
TTA00043-10F	120.0 ± 1.2 [3050 ± 30.0]

- NOTES:
- VOLTAGE RATING:  
DIELECTRIC VOLTAGE WITHSTAND TEST: 1500V / 1 Sec  
CONDUCTOR RESISTANCE ≤ 8.88Ω/1000M  
VOLTAGE RATING AC 300V
  - CABLE MARKING :  
(UL) E135710-F5 SJT 3×14AWG 105°C 300V VW-1  
c(UL) SJT 3×2.08 mm<sup>2</sup> (14AWG) 105°C 300V FT2
  - OPTIONAL LABELS:  
OPTIONAL LABEL(S) MAY INCLUDE  
UL, CURRENT AND/OR WARNING
  - CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	 an INFINITI® brand	10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041	
	OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0	DRAWN BY KGLEBOVA		04/06/2023	CATEGORY <b>POWER PRODUCTS</b>
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [.5]   ANGLES ± 1° .XXX = ± .005 [.13]	CHECKED BY DFRISIELLO	04/10/2023	PRODUCT DESCRIPTION <b>N5-15P - C13 LEFT, 15A, 125V</b>		
THIRD-ANGLE PROJECTION	APPROVED BY GUTTADAURO	04/12/2023	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SIZE <b>A</b>	CAGE CODE <b>30992</b>
	COLOR VARIATIONS MAY OCCUR			ITEM NO. <b>TTA00043-XXX</b>	REV. <b>A</b>
				SCALE: NONE	CAD FILE: TTA00043-XXX.SLDDRW
					SHEET 1 OF 1