


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TRANSTECTOR, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF TRANSTECTOR, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	04/19/2023	KGLEBOVA	GUTTADAURO

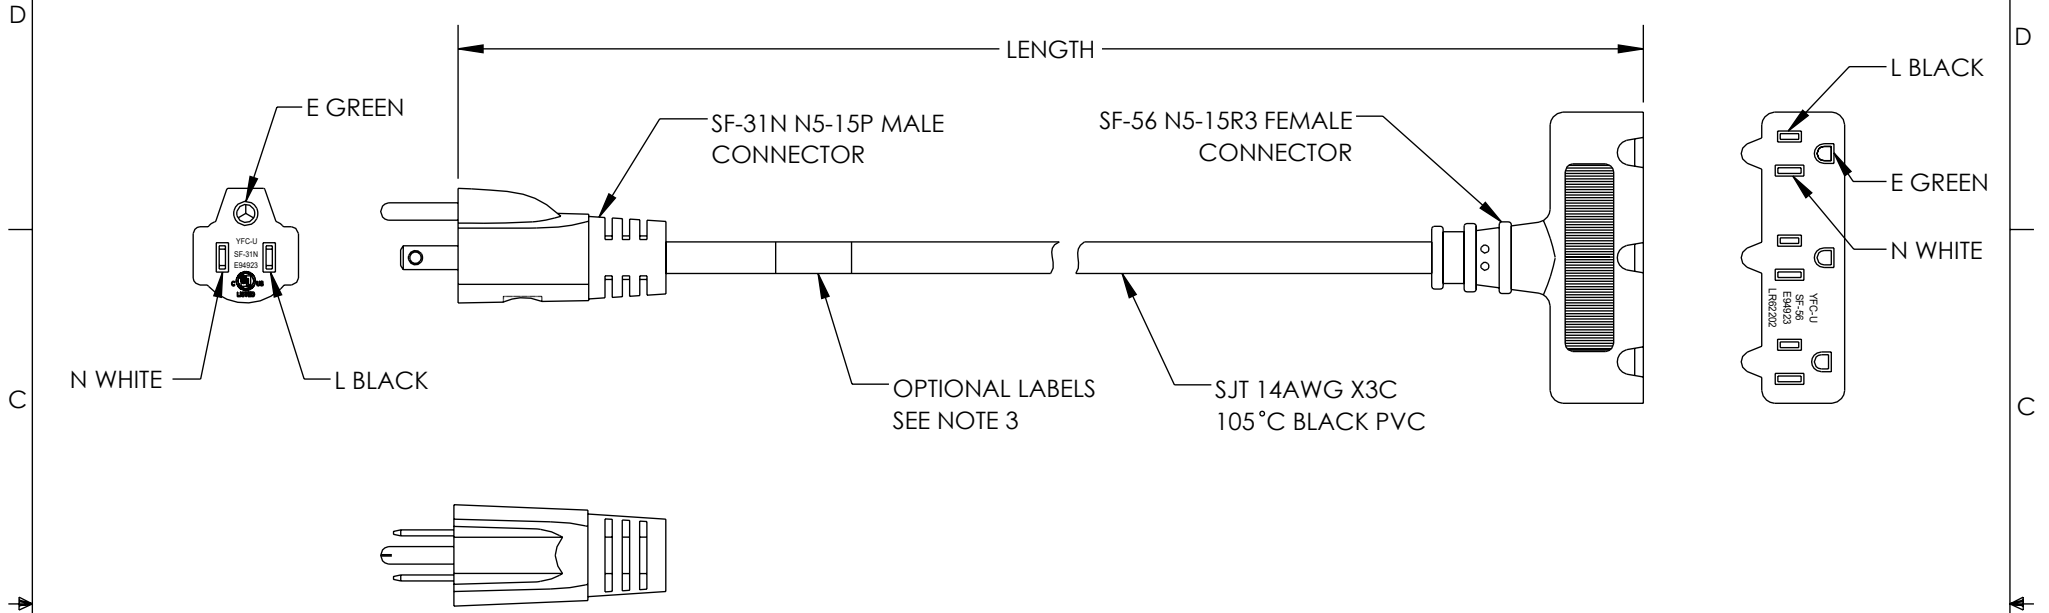

NOTES:

- VOLTAGE RATING:  
DIELECTRIC VOLTAGE WITHSTAND TEST: 1500V / 1 Sec  
CONDUCTOR RESISTANCE  $\leq 8.88\Omega/1000M$   
VOLTAGE RATING AC 300V
- CABLE MARKING :  
(UL) E135710-F5 SJT 3X14AWG 105°C 300V VW-1  
CSA LL95737 SJT3X2.08mm<sup>2</sup>(14AWG) FT2 YFC-BONEAGLE
- OPTIONAL LABELS:  
OPTIONAL LABEL(S) MAY INCLUDE  
UL, CURRENT AND/OR WARNING
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

ITEM NUMBER	LENGTH INCHES [MM]
TTA00046-3F	36.0 ± 0.4 [910 ± 10.0]
TTA00046-6F	72.0 ± 0.8 [1830 ± 20.0]
TTA00046-10F	120.0 ± 1.2 [3050 ± 30.0]

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\leq 12$ [305] = +1 [25] / -0 $> 12$ [305] $\leq 60$ [1524] = +2 [51] / -0 $> 60$ [1524] $\leq 120$ [3048] = +4 [102] / -0 $> 120$ [3048] $\leq 300$ [7620] = +6 [152] / -0 $> 300$ [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [.5]   ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS DRAWN BY KGLEBOVA CHECKED BY DFRISIELLO APPROVED BY GUTTADAURO	DATE 04/06/2023 04/10/2023 04/12/2023	10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041 an INFINITI® brand	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	CATEGORY <b>POWER PRODUCTS</b> PRODUCT DESCRIPTION <b>N5-15P - 3N5-15R POWER CORD, 15A, 125V</b>		
THIRD-ANGLE PROJECTION 	SIZE <b>A</b>	CAGE CODE <b>30992</b>	ITEM NO. <b>TTA00046-XXX</b>	REV. <b>A</b>
SCALE: NONE		CAD FILE: TTA00046-XXX.SLDDRW		SHEET 1 OF 1