
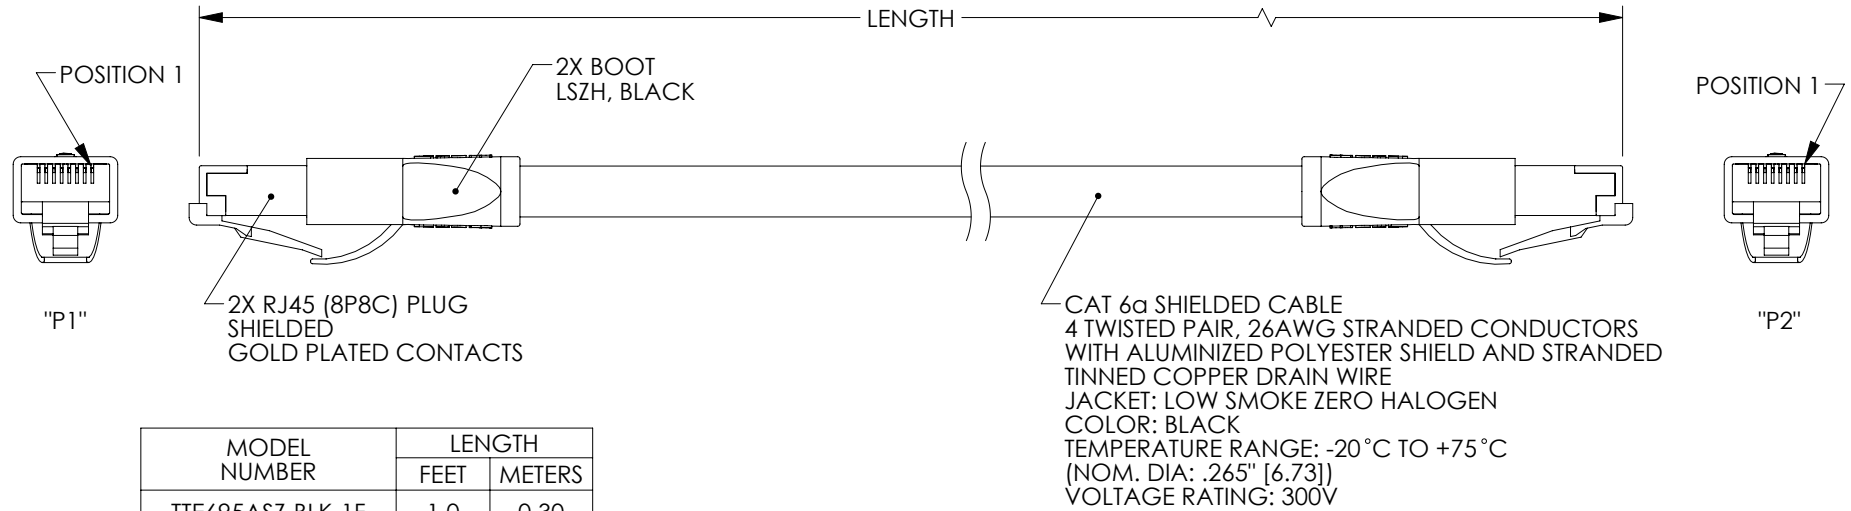


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TRANSTECTOR, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF TRANSTECTOR, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/18/2020	GUITADAURO

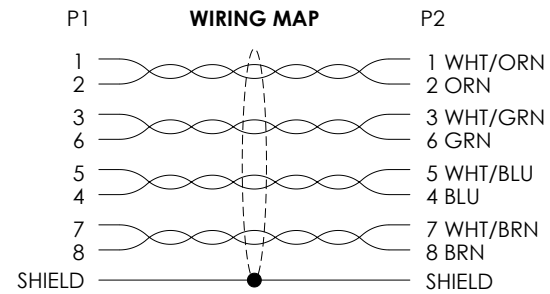

MODEL NUMBER	LENGTH	
	FEET	METERS
TTE695ASZ-BLK-1F	1.0	0.30
TTE695ASZ-BLK-2F	2.0	0.61
TTE695ASZ-BLK-3F	3.0	0.91
TTE695ASZ-BLK-5F	5.0	1.52
TTE695ASZ-BLK-10F	10.0	3.05
TTE695ASZ-BLK-15F	15.0	4.57
TTE695ASZ-BLK-25F	25.0	7.62
TTE695ASZ-BLK-50F	50.0	15.24
TTE695ASZ-BLK-75F	75.0	22.86
TTE695ASZ-BLK-100F	100.0	30.48





NOTES:

1. LENGTHS OVER 10 METERS (32.8 FT) ARE CHANNEL RATED.
2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

CABLE CHARACTERISTICS:

FLAME RATING: VW-1, UL TYPE CMX
 CORROSIVE GAS: IEC 60754
 SMOKE EMISSION: IEC 61034

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS	DATE	 an INFINITO brand 10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041
	DRAWN BY: DZINN CHECKED BY: DFRISIELLO APPROVED BY: GUITADAURO	02/18/2020 02/18/2020 02/18/2020	
THIRD-ANGLE PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE: A CAGE CODE: 30992 ITEM NO.: TTE695ASZ-BLK	REV. A SCALE: NONE CAD FILE: TTE695ASZ-BLK.SLDDRW SHEET 1 OF 1