



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TRANSTECTOR, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF TRANSTECTOR, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/18/2020	GUTTADAURO

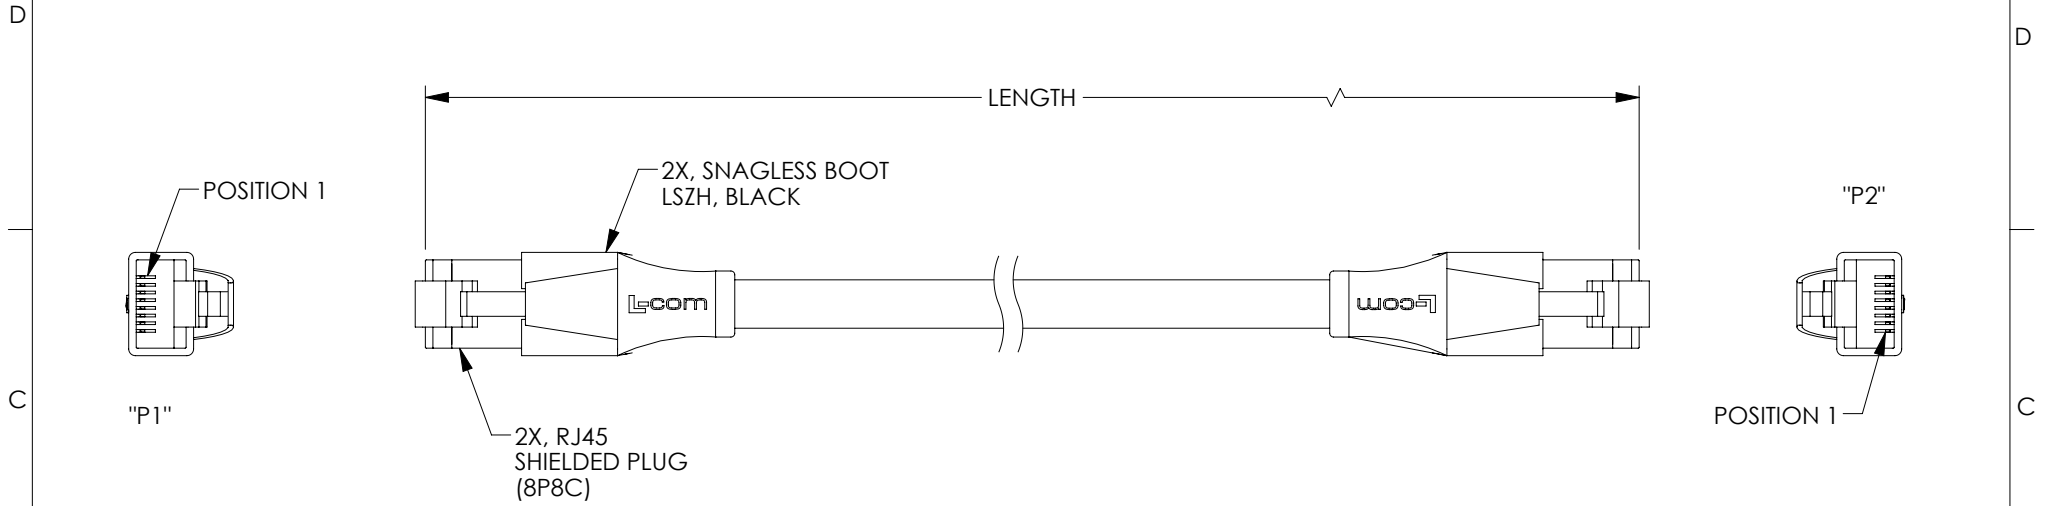

MODEL NUMBER	LENGTH	
	FEET	METERS
TTE855ODS-BLK-1F	1.0	0.30
TTE855ODS-BLK-3F	3.0	0.91
TTE855ODS-BLK-5F	5.0	1.52
TTE855ODS-BLK-10F	10.0	3.05
TTE855ODS-BLK-15F	15.0	4.57
TTE855ODS-BLK-25F	25.0	7.62
TTE855ODS-BLK-50F	50.0	15.24
TTE855ODS-BLK-75F	75.0	22.86
TTE855ODS-BLK-100F	100.0	30.48
TTE855ODS-BLK-125F	125.0	38.10
TTE855ODS-BLK-150F	150.0	45.72
TTE855ODS-BLK-175F	175.0	53.34
TTE855ODS-BLK-200F	200.0	60.96
TTE855ODS-BLK-225F	225.0	68.58
TTE855ODS-BLK-250F	250.0	76.20

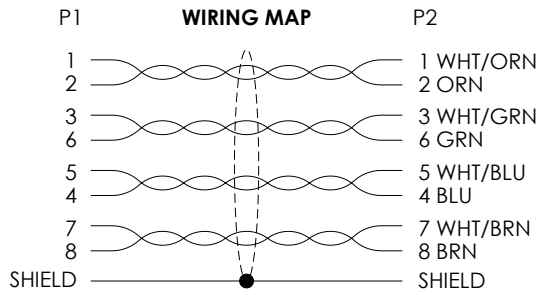

NOTES:

MATERIAL:
 PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0
 CONTACTS: PHOSPHOR BRONZE.
 PLUG SHIELDING: BRASS.
 CABLE JACKET: LINEAR LOW-DENSITY POLYETHYLENE, BLACK, (LLDPE)

FINISH:
 CONTACTS: 50 μINCHES GOLD IN CONTACT AREA
 OVER 100 μINCHES NICKEL PLATE OVERALL.
 PLUG SHIELDING: NICKEL PLATED.

CABLE CHARACTERISTICS:
 CAT 5E, SHIELDED FOUR TWISTED PAIRS MODULAR CORD,
 24 AWG SOLID BARE COPPER CONDUCTORS WITH
 ALUM/POLY FOIL TAPE, PE TAPE AND DRAIN WIRE.
 UV RESISTANT OUTDOOR JACKET.
 FLAMMABILITY: UL CMX
 VOLTAGE RATING: 60V.

MISCELLANEOUS:
 LENGTHS OVER 10 METERS (32.8 FT) ARE CHANNEL RATED.
 OPERATING TEMPERATURE RANGE: -40°C TO +70°C.
 CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
 CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS	DATE	 an INFINITO brand	10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041
	DRAWN BY DZINN	02/18/2020		
	APPROVED BY GUTTADAURO	02/18/2020	CATEGORY	TELECOM/MODULAR
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		PRODUCT DESCRIPTION	RJ45 C5E F/UTP PE BLK
THIRD-ANGLE PROJECTION	COLOR VARIATIONS MAY OCCUR	SIZE A	CAGE CODE 30992	ITEM NO. TTE855ODS-BLK
		SCALE: NONE	CAD FILE: TTE855ODS-BLK.SLDDRW	REV. A