

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TRANSTECTOR, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF TRANSTECTOR, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	04/18/2023	DZINN	GUTTADAURO

1. CONSTRUCTION:

CONDUCTOR: 10 AWG TINNED COPPER
 INSULATION: POLYVINYLCHLORIDE, .020" NOM. WALL THICKNESS
 INNER JACKET: NYLON, .004" MIN THICKNESS
 JACKET: POLYVINYLCHLORIDE, BLACK, .045" NOM. WALL THICKNESS.
 OVERALL CABLE DIAMETER

NOM. DIA.
 .116"
 .169"
 .181"
 .472±.016"

2. PHYSICAL PROPERTIES:

TEMPERATURE RATING, MAX 90°C
 TEMPERATURE RATING, MIN. -40°C
 JACKET IS UV RESISTANT

3. ELECTRICAL CHARACTERISTICS:

DIELECTRIC STRENGTH (kv/1min) 2.0(AC)
 VOLTAGE RATING, MAX. 600V
 MAX COND D.C. RESISTANCE AT 20°C (W/km) ≤3.546

4. REFERENCE STANDARD:


UL1277 & UL1581 & UL83
 MEETS (UL) VW-1 FLAME TEST

5. MARKING IN WHITE:



E497465 (UL) TYPE TC-ER THHN/THWN 2C 10AWG 90°C DRY/75°C WET
 600V SUN RES VW-1 -40°C JHOSIN

6. CONDUCTOR COLOR:

1. RED
2. BLACK

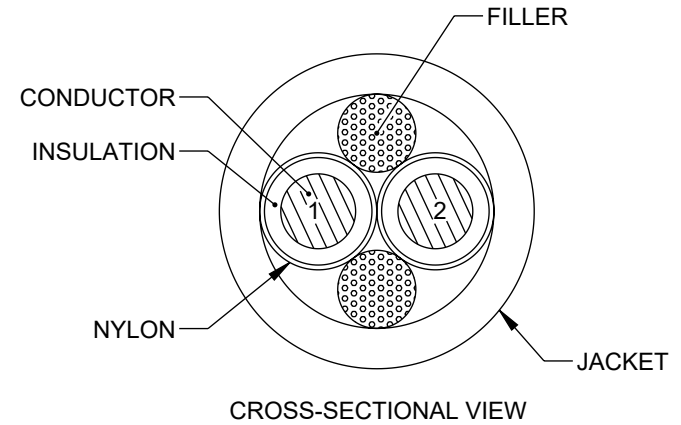

REGULATORY COMPLIANCE:
 EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5] FRACTIONS ± 1/32 .XX = ±.02 [.5] ANGLES ± 1° .XXX = ±.005 [.13]	APPROVALS	DATE	 an INFINITI® brand 10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041		
	DRAWN BY DZINN	04/18/2023			
	CHECKED BY HBAKKE	04/18/2023			
	APPROVED BY DGUST	04/18/2023			
THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION POWER BULK TRAY CABLE, ER, 10AWG, 2C, BLK, 600V, 1KFT	CATEGORY BULK CABLE		
	COLOR VARIATIONS MAY OCCUR	SIZE A	CAGE CODE 30992	ITEM NO. BPCTC102	REV. A
		SCALE: NONE	CAD FILE: BPCTC102.SLDRW	SHEET 1 OF 1	