

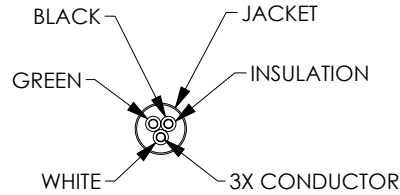


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TRANSTECTOR, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF TRANSTECTOR, INC. IS PROHIBITED.



REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	04/19/2023	KGLEBOVA	GUTTADAURO

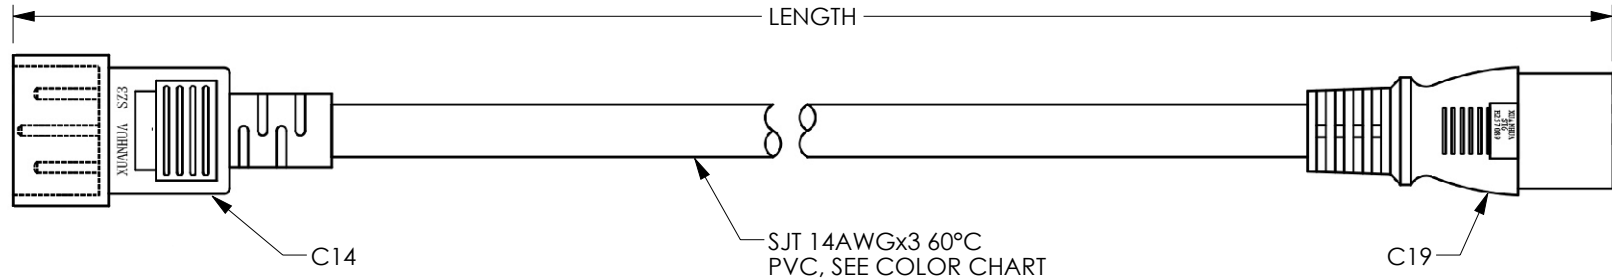

LENGTH FEET [METER]	ITEM NUMBER
3.0 [.91]	TTA00006-03F
6.0 [1.83]	TTA00006-06F

NOTES:

- VOLTAGE RATING: AC \geq 1500V/S
- CONNECTOR C14 POWER RATING: 15A UL-E257089
- CONNECTOR C19 POWER RATING: 15A UL-E257089
- CABLE: SJT 14AWGx3, 300V, 60°C VW-1 E313867 FT1
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 > 12 [305] ≤ 60 [1524] = +2 [51] / -0 > 60 [1524] ≤ 120 [3048] = +4 [102] / -0 > 120 [3048] ≤ 300 [7620] = +6 [152] / -0 > 300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = $\pm .2$ [5] FRACTIONS $\pm 1/32$.XX = $\pm .02$ [.5] ANGLES $\pm 1^\circ$.XXX = $\pm .005$ [.13]	APPROVALS	DATE	 an INFINIT@ brand 10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041	
	DRAWN BY KGLEBOVA CHECKED BY DFRISIELLO APPROVED BY GUTTADAURO	04/05/2023 04/07/2023 04/10/2023		CATEGORY POWER PRODUCTS
THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION SERVER/PDU POWER CORD C-14 TO C19, 15Amp	SCALE: NONE CAD FILE: tta00006-xxx.SLDDRW	
	SIZE A	CAGE CODE 30992	ITEM NO. TTA00006-XXX	REV. A
			SHEET 1 OF 1	