



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TRANSTECTOR, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF TRANSTECTOR, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/18/2020	GUTTADAURO

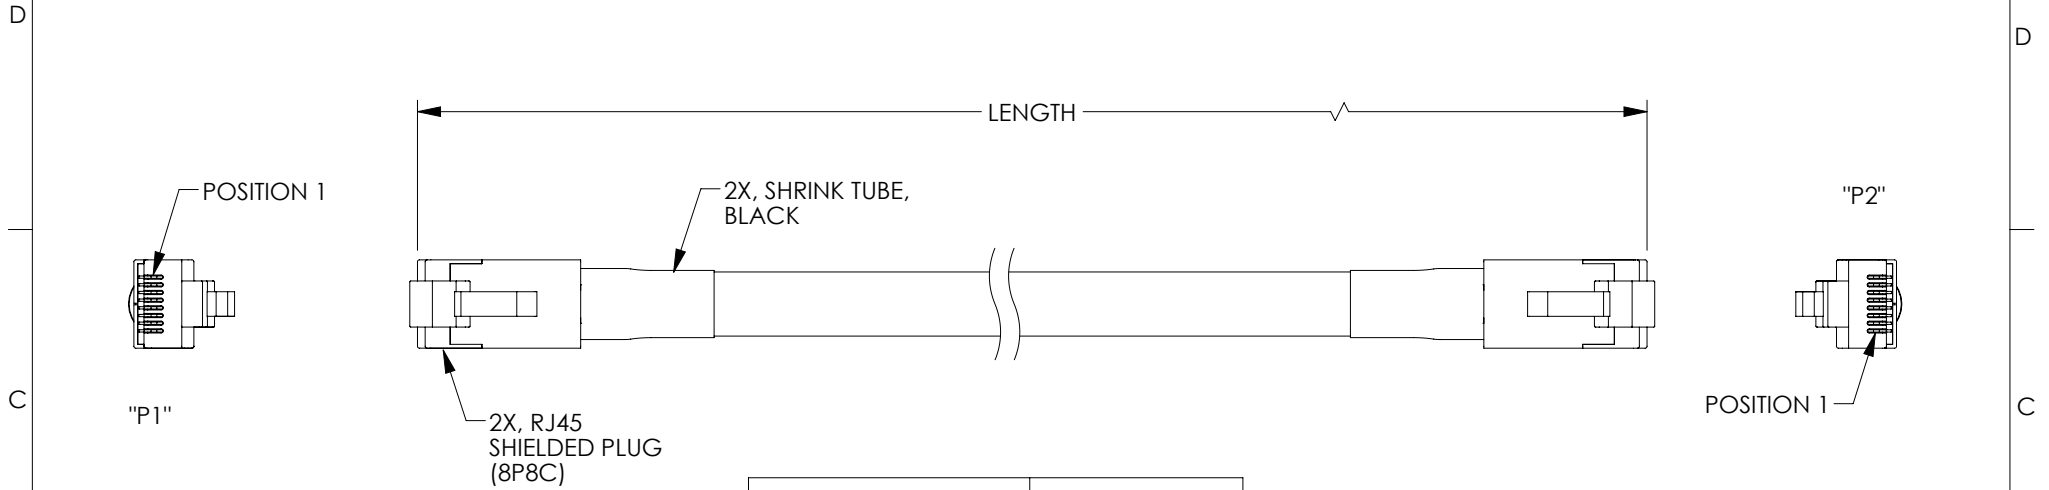

MODEL NUMBER	LENGTH	
	FEET	METERS
TTE695AODS-BLK-1F	1.0	0.30
TTE695AODS-BLK-3F	3.0	0.91
TTE695AODS-BLK-5F	5.0	1.52
TTE695AODS-BLK-10F	10.0	3.05
TTE695AODS-BLK-15F	15.0	4.57
TTE695AODS-BLK-25F	25.0	7.62
TTE695AODS-BLK-50	50.0	15.24
TTE695AODS-BLK-75F	75.0	22.86
TTE695AODS-BLK-100F	100.0	30.48
TTE695AODS-BLK-125F	125.0	38.10
TTE695AODS-BLK-150F	150.0	45.72
TTE695AODS-BLK-175F	175.0	53.34
TTE695AODS-BLK-200F	200.0	60.96
TTE695AODS-BLK-225F	225.0	68.58
TTE695AODS-BLK-250F	250.0	76.20

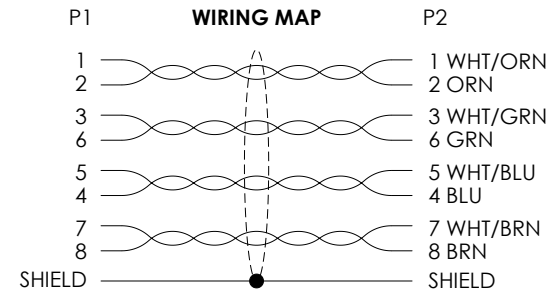

**NOTES:**

**MATERIAL:**

PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0  
 CONTACTS: PHOSPHOR BRONZE.  
 PLUG SHIELDING: BRASS  
 CABLE JACKET: LINEAR LOW-DENSITY POLYETHYLENE, BLACK, (LLDPE)

**FINISH:**



CONTACTS: 50 μINCHES GOLD IN CONTACT AREA  
 OVER 100 μINCHES NICKEL PLATE OVERALL.  
 PLUG SHIELDING: NICKEL PLATED

**CABLE CHARACTERISTICS:**

CAT 6A, SHIELDED FOUR TWISTED PAIRS MODULAR CORD,  
 23 AWG SOLID BARE COPPER CONDUCTORS WITH  
 ALUM/POLY FOIL TAPE, PE TAPE, AND DRAIN WIRE.  
 INNER JACKET: PVC, GRAY  
 OUTER JACKET: UV RESISTANT, DIRECT BURIAL, OUTDOOR JACKET.  
 VOLTAGE RATING: 60V.

**MISCELLANEOUS:**

LENGTHS OVER 10 METERS (32.8 FT) ARE CHANNEL RATED.  
 OPERATING TEMPERATURE RANGE: -40°C TO +70°C.  
 CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.  
 CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]      FRACTIONS ± 1/32 .XX = ± .02 [5]      ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS	DATE	 an INFINITO brand 10701 Airport Road, Hayden, ID 83835 Phone: 1.208.635.6400 Fax: 1.208.955.2041	
	DRAWN BY DZINN	02/18/2020		CATEGORY TELECOM/MODULAR
THIRD-ANGLE PROJECTION 	CHECKED BY DFRISIELLO	02/18/2020	PRODUCT DESCRIPTION <b>RJ45 C6a F/UTP 23SLD LLDPE CMX          BLK OTDR</b>	
APPROVED BY GUTTADAURO	02/18/2020	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SCALE: NONE    CAD FILE: TTE695AODS-BLK.SLDDRW    SHEET 1 OF 1
	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	CAGE CODE <b>30992</b> ITEM NO. TTE695AODS-BLK	REV. <b>A</b>